

XTA Electronics Ltd.


The Design House
 Vale Business Park
 Worcester Road
 Stourport-on-Severn
 Worcs. DY13 9BZ. England
 Tel: 01299 879977 (Intl. +44 1299 879977)
 Fax: 01299 879969 (Intl. +44 1299 879969)



...copy and reloading presets for a DP226/4

First, the presets must be copied from the source unit onto the PCMCIA card. This accomplished as follows.

- ◆ Make sure the 'write protect' switch on the top of the card is set to the 'off' position.
- ◆ Insert the card into the slot on the front of the source unit.
- ◆ Press and hold the 'MENU' key as the unit is switched on, until it asks for a security code. Use the 'EDIT' keys to enter 3AB4 (3AB42 for a DP224), where the keys represent 'A' for channel A's 'EDIT' key, 'B' for channel B and so on, as shown below.

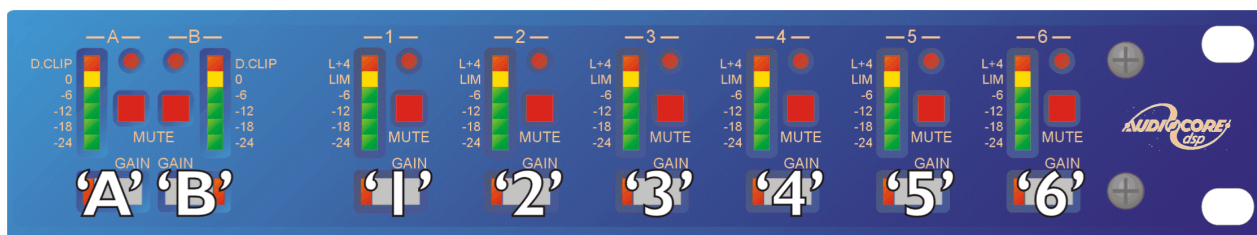

- ◆ When prompted to remove the card, **do not do so until the 'write protect' switch on the card has been turned on.**
- ◆ The PCMCIA card now holds a copy of the presets in the unit.

Copying this to the destination DP226/4 is straightforward.

Here's what to do.

- ◆ Switch the unit on.
- ◆ Press MENU, select the System Sub-Menu using the BACK and NEXT keys; press ENTER.
- ◆ Next, choose 'Preset Update', and press ENTER.
- ◆ Insert the PCMCIA card into the slot on the destination unit.
- ◆ Press ENTER to confirm.
- ◆ Unit will load presets and re-boot.
- ◆ Remove the card.